



## OPTIMUM 1930 E

### Optimum compactness

- Width of 2 ft 6 in to operate in the most congested areas
- Compact stowed height for easy access through standard doorways

### Exceptional productivity

- Driveable at full height
- Load capacity up to 500 lbs
- Extended platform
- Long working cycles

### Reliable and easy to maintain




**Haulotte**   
GROUP  
More than lifting




### TECHNICAL DATA

### Optimum 1930 E

|                                            |                     |
|--------------------------------------------|---------------------|
| Working height                             | 24 ft 11 in         |
| Platform height                            | 18 ft 11 in         |
| Driveable at full height up to             | 18 ft 11 in         |
| Lift capacity - inside                     | 500 lbs             |
| Lift capacity - outside                    | N/A                 |
| <b>A</b> Platform length - outside         | 5 ft 8 in           |
| <b>B</b> Platform length - extended        | 8 ft 8 in           |
| Extension length                           | 3 ft                |
| <b>C</b> Platform width - outside          | 2 ft 3 in           |
| <b>D</b> Storage height                    | 6 ft 7 in           |
| <b>E</b> Height - stowed                   | 6 ft 7 in           |
| <b>F</b> Overall width                     | 2 ft 6 in           |
| <b>G</b> Length                            | 6 ft 2 in           |
| <b>H</b> Wheelbase                         | 4 ft 6 in           |
| <b>I</b> Ground clearance                  | 4 in                |
| Ground clearance - Pothole guards deployed | 1 in                |
| Drive speed                                | 0.4 - 2.8 mph       |
| Gradeability                               | 25 %                |
| Lift / lower speed                         | 20 s / 37 s         |
| Turning radius - outside                   | 5 ft 7 in           |
| Non-marking tires                          | 12.5 x 4.25         |
| Batteries                                  | 24 V - 180 Amp (C5) |
| Hydraulic system capacity                  | 5 gal               |
| Weight                                     | 3,131 lbs           |

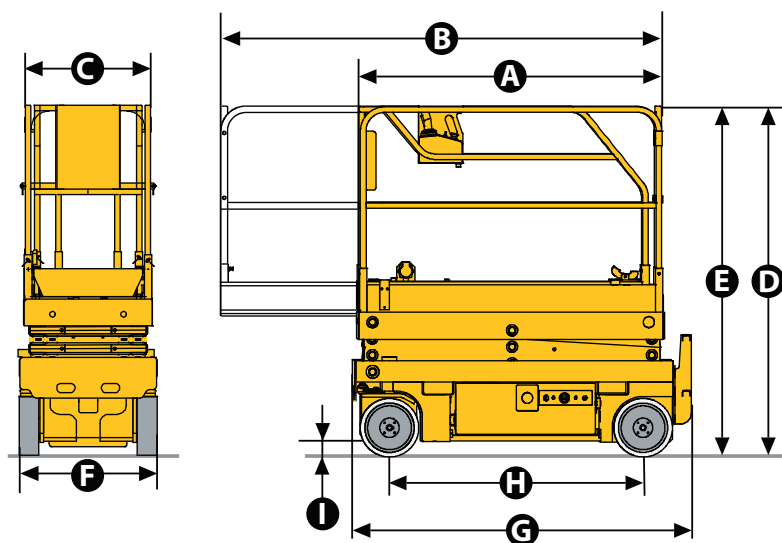

Optimum 1930 E

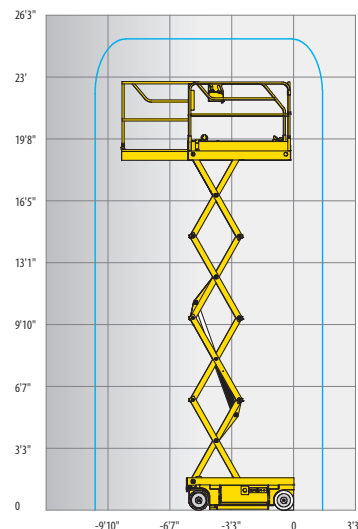

### STANDARD EQUIPMENT

- Pothole guards
- Battery charge indicator
- Proportional lift and drive
- Slide out battery compartment
- Swing out component tray
- Battery charger 110V / 60Hz
- Non-marking tires
- Free wheeling device
- Tilt alarm
- Load management system in the platform
- Manual platform lowering valve
- Integrated forklift pockets
- Towing hooks
- Horn
- Hour meter

### OPTIONS AND ACCESSORIES

- Flashing beacon
- Alarm package (descent and travel)
- 70 W platform work light

